




ALU 75



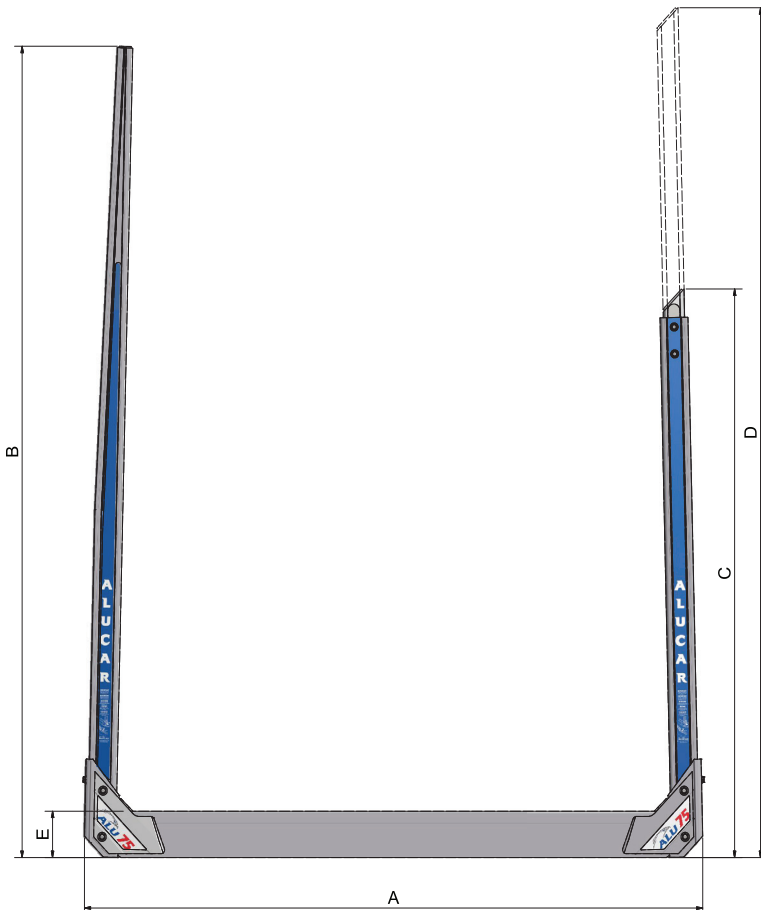

Upgraded seven ton aluminium bunk

- modernized appearance
- even stronger bunk frame
- support cassette as standard
- removable stakes
- one length or extendable stakes
- anodizing - the ultimate surface finishing
- effective stripes
- lights as option

Easy to install. Simple and safe to handle. Nut socket to speed up the installation.

The material of the stakes is optimized for the load. Due to the surface treatment of the bunk, less maintenance is needed, the lifecycle of the bunk is increased and the bunk is less prone to corrosion.

	A	B	C-D	E	kg
ALU 75	2550	max 3250	—	180	104,0–115,6
ALU 75	2600	max 3250	—	180	104,8–116,4
ALU 75 E ⁽¹⁾	2550	—	2200–3300	180	116,0
ALU 75 E ⁽¹⁾	2600	—	2200–3300	180	116,8

Weight of the fixings depending on the model approx. 28 kg/pair.

⁽¹⁾ extendable stake

